




Distributed by
DARTRONICS, INC.
PACKAGING AUTOMATION SPECIALISTS

BEL 5150u

Semi-Automatic Form, Pack & Seal System
Up to 15 cases per minute

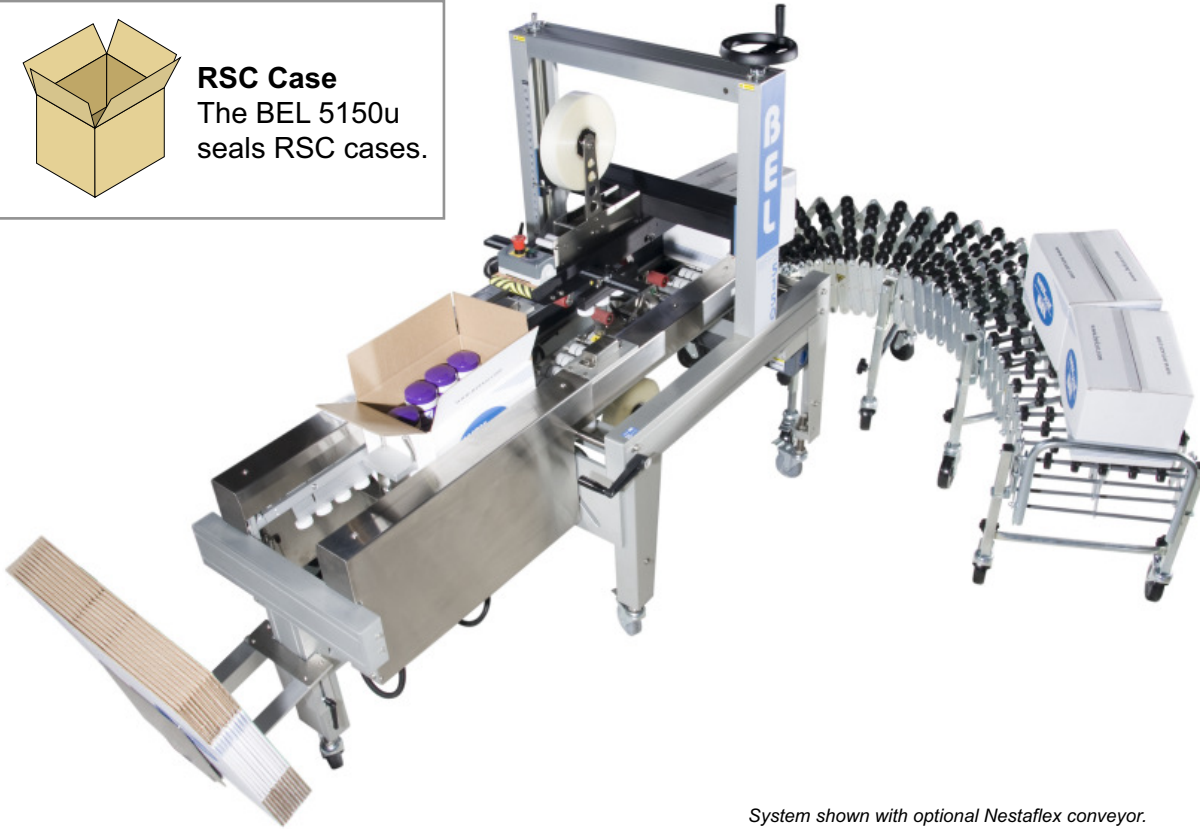


System shown with optional Nestaflex conveyor.

Semi-Automatic Form, Pack & Seal System



Power Save Mode

Built-in Power Save Mode powers down the BEL 5150u when it is not in use and restarts automatically when cases are loaded by the operator.




Squareness Assured

BEL's innovative and powerful Uni-Drive system synchronizes conveyor belt speed, eliminating case skew, so that cases leave the machine squarely taped.



Easy Set-up Guides

A color-coded pictorial guide means convenient setup and quick change-over in seconds. Bi-lingual instructions are available.



Superior Tape Application

The BEL 5150u is equipped with state-of-the-art DEKKA High Performance tape heads that are easily loaded in or out of the machine in 30 seconds or less.

Form Pack Seal

BEL 5150u Semi-Automatic Form, Pack & Seal System

BEL 5150u Features

- Energy smart features such as Power Save Mode reduce operating costs associated with unattended machinery running.
- Electro-pneumatic system provides greater control over the forming of corrugated with higher recycled content.
- Centralized, color-coded adjustment guide assists operator with changeovers and minimizes changeover time.
- Built-in box stand keeps case blanks handy for the operator, providing increased through-put and enhanced ergonomics by minimizing the operator reaching and twisting during packing.
- Rust free/paint free frame construction eliminates unsightly machine wear and extends machine life.
- Unitized frame design provides ease of mobility and greater machine life.

Complete Solution



A32 Accumulation Table

Rotary turntable that presents product to the operator for packing. Features an adjustable speed motor.



Nestaflex Conveyor


Nestaflex conveyors are flexible units that can be lengthened, shortened or curved to fit changing packaging situations.

How the BEL 5150u Works



RSC Case

The BEL 5150u seals RSC cases.



1 Form

The operator inserts a case blank. The BEL 5150u folds the bottom flaps. Cases are positioned for packing and easy transfer to case sealer.



2 Pack

The BEL 5150u holds the case in place for efficient "hands free" loading.



3 Seal

When fully loaded, the operator easily pushes the case into the case sealer which then tapes the top and bottom flaps.

BEL 5150u Specifications

Case Size Range	Length	Width	Height
Minimum	8" 203 mm	5" 127 mm	4.5" 114 mm
Maximum	26" 660 mm	18" 457 mm	21" 533 mm
Infeed/Outfeed Height (with adjustable leg extensions)			
Frame	22" (559 mm)		
Minimum	25" (635 mm)		
Maximum	32" (813 mm)		
Machine Speed: Up to 15 cases per minute. Oversize model available. Consult factory for case size ranges.			

Specifications are subject to change without notice.



DARTRONICS, INC.

PACKAGING AUTOMATION SPECIALISTS



Dartronic, Inc.
150 William Street
Perth Amboy, NJ 08861

Phone: 732-324-0800
sales@dartronic.com
www.dartronic.com

a division of Pro Mach 

Backed by Wexxar's warranty and experienced, nationwide service team.