



Flex E Pak 2252

Form, Pack & Seal System
 Up to 20 cases per minute



* System shown with optional Nestaflex outfeed conveyor.



Flex-E-Pak

Flexible - Ergonomic - Engineered Packaging System



Squareness Assured

The innovative Pin & Dome system reliably and repeatedly opens case blanks, ensuring that each case is squarely formed and bottom sealed.



Controlled Conveying & Accumulation

Fully integrated with Shuttleworth systems. Gentle product handling and case conveying to eliminate product or case skew, so that contents are packed with ease.



Easy Set-up

A color-coded instructions and dials mean convenient setup and quick change-over in seconds. Spanish and French language instructions are available.



Superior Tape Application


The 2252 is equipped with state-of-the-art DEKKA High Performance tape heads that are easily loaded in or out of the machine in 30 seconds or less.

Flex E Pak 2252 Flexible Packaging System

Flex E Pak 2252 Features

- Control panel features a user friendly touch screen to control and monitor all systems.
- The case former's Flex Speed feature optimizes your machine functions and meets the needs of each case size by providing speed ranges that the operator can quickly access and select.
- Illustrated, color-coded adjustment instructions and dials assist operators with changeovers and minimizes changeover time.
- No vacuum: equipped with WEXXAR's renowned 'pin and dome' case opening technology.
- Fully automatic Remote Demand Control, pauses production when the product conveyor is full.

Customized Solution

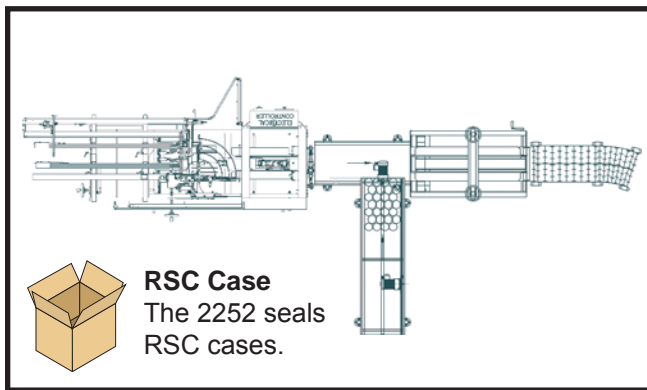

Create Your Flex E Pak

These modular, engineered systems give you the ultimate in flexibility and can be customized for speed, product flow, or for changing packaging situations. Pick from our standard Flex E Pak elements to create a system that is perfect for your application.

2252 Specifications

Case Size Range	Length	Width	Height
Minimum	7 1/4" 184 mm	7 1/4" 184 mm	6" 150 mm
Maximum	18" 457 mm	14" 356 mm	15" 381 mm

Machine Speed: Up to 20 cases per minute, depending on the case dimensions and corrugated quality. Consult factory with samples. Under and over size options available.

How the 2252 Works



1 Form

A flat case blank is opened by pins injected into the flutes, opening the case perfectly square (optional 90 degrees). Case bottoms are sealed with tape.



2 Convey, Accumulate & Pack

Products are delivered and accumulated for packing. The conveyor holds the case in place for efficient loading. When fully loaded, the conveyor advances the case into the case sealer.



3 Seal

Case flaps are automatically folded with BEL's safe Snap Folder technology. The sealer then tapes the top and bottom flaps.



DARTRONICS, INC.

PACKAGING AUTOMATION SPECIALISTS



Dartronics, Inc.
150 William Street
Perth Amboy, NJ 08861

Phone: 732-324-0800
sales@dartronics.com
www.dartronics.com

powered by Pro Mach

Backed by Wexxar's warranty and experienced, nationwide service team.