




Semi-Automatic Tape Sealer
Up to 30 cases per minute




Distributed by
DARTRONICS, INC.
PACKAGING AUTOMATION SPECIALISTS

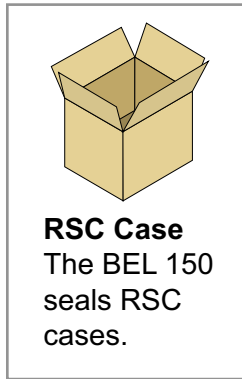

RSC Case
The BEL 150
seals RSC
cases.


*System shown with optional
roller conveyor.*

Semi-Automatic Case Taper




Squareness Assured

BEL's innovative and powerful Uni-Drive system synchronizes conveyor belt speed, eliminating case skew, so that cases leave the machine squarely taped.



Lasting Performance

The BEL 150 features heavy duty, corrosion resistant aluminum C-Beam construction and compact design to provide lasting performance in the most demanding production environments.



Superior Tape Application

The BEL 150 is equipped with state-of-the-art DEKKA High Performance stainless steel tape heads that are easily loaded in or out of the machine in 30 seconds or less.



Easy Case Change

The BEL 150 is user-friendly, enabling the operator to make box size changes from either side of the machine quickly and easily, in 30 seconds or less.

Case Sealer
BEL 150

BEL 150 Semi-Automatic Top and Bottom Case Taper

BEL 150 Features

- Rust free/paint free frame construction guards against machine wear and extends machine life
- Built-in safety systems that protect against power interruption or overload
- Uni-Drive squaring mechanism that mean more presentable cases
- Quick and easy maintenance, meaning a minimum of downtime
- Standard DEKKA 22 Stainless Steel 2" tape heads and optional DEKKA 3" tape heads available

Complete Solution



BEL 505 Case Former

The BEL 505 improves efficiency and ergonomics. Inserting a case into the BEL 505 results in all four bottom flaps being automatically folded, leaving hands free to pack.



BEL 150X Oversize Case Taper


The oversize model is available to accommodate larger case requirements.




BEL 150SS Stainless Steel Case Taper

The stainless steel is available for washdown environments.

How the BEL 150 Works




RSC Case
The BEL 150 seals RSC cases.

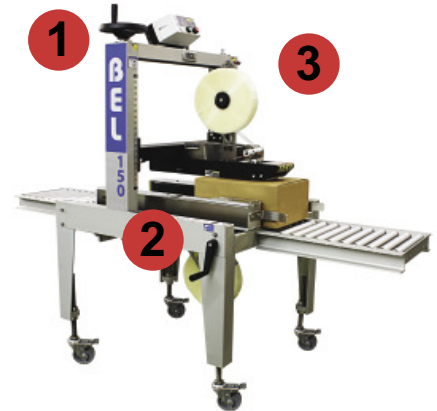


1 Quick Change Handle

Upper assembly is adjusted with a hand wheel which increases or reduces size in seconds.



2 Uni-Drive Case Transport

Uni-drive system synchronizes the case conveyor, assuring case squareness during taping.



3 Top & Bottom Sealed

Superior case sealing performance is achieved with its quality tape application. The BEL 150 comes standard with DEKKA tape heads.

BEL 150 Specifications

| Case Size Range | Length | Width | Height |
|--|------------------|------------------|------------------|
| Minimum | 8" 203 mm | 5 1/2" 140 mm | 4 1/2" 114 mm |
| Maximum | unlimited | 18" 457 mm | 21" 533 mm |
| Infeed/Outfeed Height (with adjustable foot pads) | | | |
| Note: Castors add 6" to minimum and maximum height. | | | |
| Minimum | 23 1/2" (597 mm) | | |
| Maximum | 32" (813 mm) | | |
| Machine Speed: Up to 30 cases per minute. Oversize model available. Consult factory for case size ranges. | | | |

Specifications are subject to change without notice.



DARTRONICS, INC.

PACKAGING AUTOMATION SPECIALISTS



Dartronics, Inc.
150 William Street
Perth Amboy, NJ 08861

Phone: 732-324-0800
Fax: 732-324-4488
Email: sales@dartronics.com
Web: www.dartronics.com

a division of Pro Mach 


Backed by Wexxar's warranty and experienced, nationwide service team.



Oversize Semi-Automatic Tape Sealer
Up to 30 cases per minute




DARTRONICS, INC.
PACKAGING AUTOMATION SPECIALISTS




RSC Case
The BEL 150X
seals RSC
cases.

Oversize Semi-Automatic Case Taper




Squareness Assured

BEL's innovative and powerful Uni-Drive system synchronizes conveyor belt speed, eliminating case skew, so that cases leave the machine squarely taped.



Lasting Performance

The BEL 150X features heavy duty, corrosion resistant aluminum C-Beam construction and compact design to provide lasting performance in the most demanding production environments.



Superior Tape Application

The BEL 150X is equipped with state-of-the-art DEKKA High Performance stainless steel tape heads that are easily loaded in or out of the machine in 30 seconds or less.



Easy Case Change

The BEL 150X is user-friendly, enabling the operator to make box size changes from either side of the machine quickly and easily, in 30 seconds or less.

BEL 150X Case Sealer

BEL 150X Oversize Semi-Automatic Case Taper

BEL 150X Features

- Paint free, corrosion resistant frame, guards against contamination from flaking or peeling paint
- Built-in safety systems that protect against power interruption or overload
- Uni-Drive squaring mechanism that mean more presentable cases
- Quick and easy maintenance, meaning a minimum of downtime
- Standard DEKKA 22 Stainless Steel 2" tape heads and optional DEKKA 3" tape heads available

Complete Solution



BEL 505 Case Former

The BEL 505 improves efficiency and ergonomics. Inserting a case into the BEL 505 results in all four bottom flaps being automatically folded, leaving hands free to pack.



BEL 150 Case Taper


Semi-automatic case taper that accepts uniform case sizes for top and bottom case sealing.



BEL 150SS Stainless Steel Case Taper

The stainless steel is available for washdown environments.

How the BEL 150X Works




RSC Case
The BEL 150X seals RSC cases.




1 Quick Change Handle

Upper assembly is adjusted with a hand wheel which increases or reduces size in seconds.



2 Uni-Drive Case Transport

Uni-drive system synchronizes the case conveyor, assuring case squareness during taping.



3 Top & Bottom Sealed

Superior case sealing performance is achieved with its quality tape application. The BEL 150X comes standard with DEKKA tape heads.

BEL 150X Specifications

| Case Size Range | Length | Width | Height |
|--|------------------|-------------------|---------------|
| Minimum | 8" 203 mm | 6 1/2" 165 mm | 5" 127 mm |
| Maximum | unlimited | 25 1/2" 648 mm | 30" 762 mm |
| Infeed/Outfeed Height (with adjustable foot pads) | | | |
| Note: Castors add 6" to minimum and maximum height. | | | |
| Minimum | 19 1/2" (495 mm) | | |
| Maximum | 28" (711 mm) | | |
| Machine Speed: Up to 30 cases per minute. Oversize model available. Consult factory for case size ranges. | | | |

Specifications are subject to change without notice.



DARTRONICS, INC.

PACKAGING AUTOMATION SPECIALISTS



Dartronics, Inc.
150 William Street
Perth Amboy, NJ 08861

Phone: 732-324-0800
Fax: 732-324-4488
Email: sales@dartronics.com
Web: www.dartronics.com

a division of Pro Mach

Backed by Wexxar's warranty and experienced, nationwide service team.