



225-226

Fully Automatic Case Erectors



Dual Opposing Vacuum Case Opening

This unique design feature ensures that each case is opened positively from both sides. It ensures the efficient and reliable opening of cases, and overcomes problems that can be associated with stiff board and glue migration from the manufacturer's joint.



Low Cost of Ownership

The Endline 225 Case Erector is designed to give you the best possible value for your investment. Our unique set of features and benefits means you will gain the maximum productivity with minimal stoppage time for problem-solving or case size changes.



Low Level Hopper

Allows for the ergonomic loading of heavy case blanks. The in-line process flow enables a more efficient use of space in the plant layout. Hopper extension options are available to increase capacity, thus lengthening the time between reloads.



Clear Access

Simple mechanical operation and clear access for easy size change, cleaning and maintenance.



Easy to Use

The 225 is designed with clear access, simple controls and quick to adjust to size changes. The machines are operator friendly and allow for quick and easy size change, cleaning and maintenance to ensure minimal machine down time.



Robust Construction

Built with high quality components and housed in a robustly designed chassis, the 225 is robust enough to withstand the rigours of typical 24-hour end-of-line packaging environments.






225 & 226

Fully Automatic
Case Erectors

Options include:

- Low hopper sensing
- Low tape and no tape sensing
- Visual/audible failure alarm
- Low glue sensing (226)

225 dimensions shown

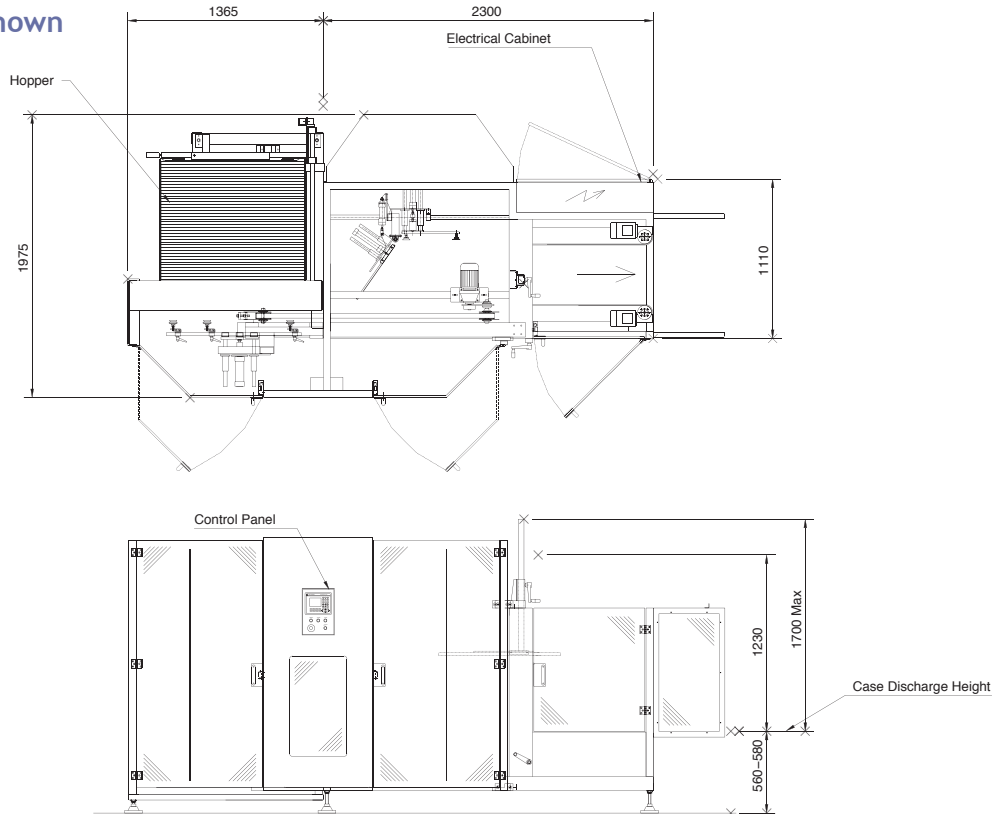

Case Dimensions (mm).

	Length	Width	Height (Open)
225/226 Minimum	200	200	175
Maximum	700	500	750

Note:

- The 225 case erector seals cases with self-adhesive tape.
- The 226 case erector seals cases with hot melt glue.
- Case speeds subject to case size.
- Machine can be modified for cases outside case size range. Please contact Endline to advise.

Speed

- Up to 10 cases per minute

Electrical Supply

- Three phase:
380 - 415V, 50Hz, 6A/phase

Pneumatics

- 200 litres/min (5.5 bar)
(19.5 litres/cycle)

Machine Finish

- Mild steel, powder coated white (RAL 9010) or stainless steel

Tape Size

- Standard: up to 50mm wide
- Optional: up to 75mm wide

© Endline reserves the right to change specifications without prior notice.



Distributed by

DARTRONICS, INC.

PACKAGING AUTOMATION SPECIALISTS



150 William Street Perth Amboy, NJ 08861

Phone: 732.324.0800 Fax: 732.324.4488 Toll Free: 1.800.298.8936 E-mail: sales@dartronics.com

