



DARTRONICS, INC.

PACKAGING AUTOMATION SPECIALISTS



744

High Speed Fully-Automatic Random Sealer



Random Case Sealing

The Endline 744 will automatically adjust its settings to close and seal 0201 cases throughout the case size range in any random sequence. The 744 can operate on small, large, lightweight or heavy cases at speeds of 30 cases per minute.



Compact

The Endline 744 can help increase factory space as multiple lines can feed into one machine. The 744 is well suited to environments where there is insufficient space for multiple sealers or there are regular case size changes.



Barcode Reading Scanner

The 744 has barcode scanning technology incorporated, to read the data on the box before it enters the sealing section of the machine so the 744 has time to adjust itself accordingly.



Low Cost of Ownership

All Endline's machines are designed for maximum efficiency and productivity thereby reducing the cost of ownership to a minimum. This case sealer come sat a low capital cost and immediate savings can be seen through reduced labour costs and increased packing speeds.



Servo Drives

While allowing the machine to reach higher speeds - 30 cases per minute - the servo drive system permits greater flexibility and control by allowing acceleration and deceleration of the moving heads through the closing and sealing process.



Robust Construction

High quality components housed in a robust chassis ensure minimal servicing and enable 24 hour operation. Designed for the rigours of typical end-of-line packaging environments.



Random Case Sealers




744

High Speed
Fully-Automatic
Random Sealer

Options include:

- Low tape and no tape sensing
- No scan reject conveyor
- Automatic tapehead retract

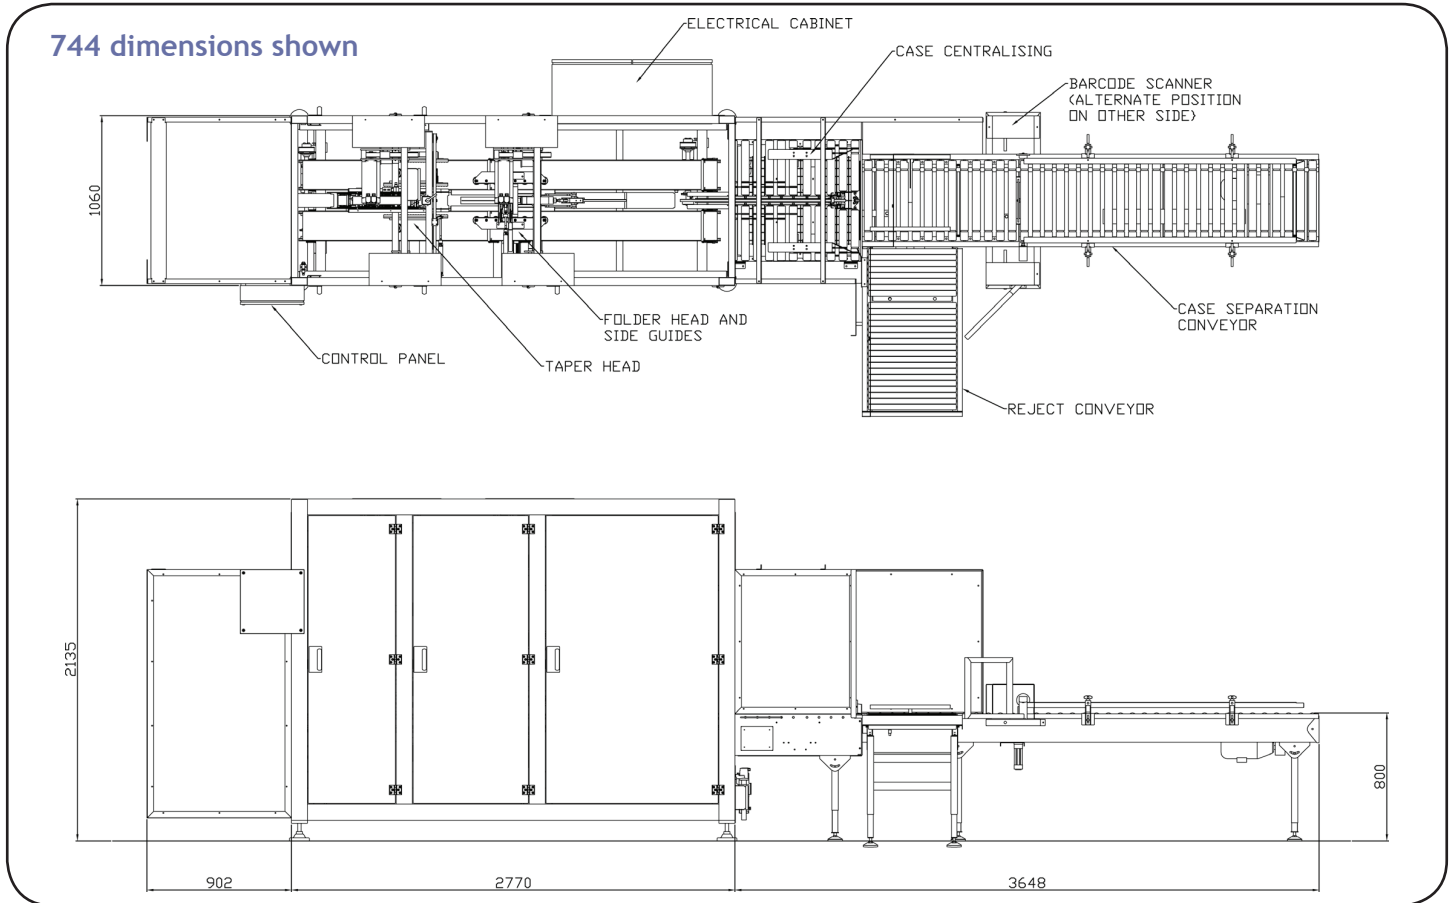

Case Dimensions (mm).

Length	Width	Height
200-600	200-500	110-510

Note:

- The 744 will achieve 30 cases per minute across the full case size range in any random sequence.
- Machine can be modified for cases outside case size range. Please contact Endoline to advise.

Speed

- 30 cases per minute

Machine Finish

- Mild steel, powder coated white (RAL 9010) or stainless steel

Electrical

- 63a 3P + N + E 415v 50Hz

Tape Size

- Standard: up to 50mm wide
- Optional: up to 75mm wide

Pneumatics

- 80psi (5.5 bar)

Endoline Machinery Limited

Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom
Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endoline-automation.com

