





LM1012TTS

*Semi-Automatic Table-Top
Label Applicator System*

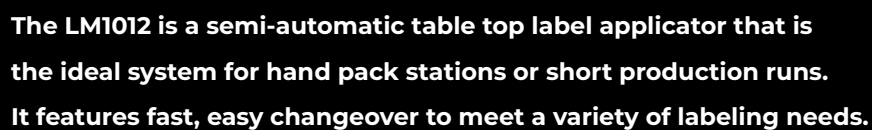

**Advanced Technology + Unmatched Capabilities—
That's the PLUS LabelMill brings to your business**



Precision meets versatility in the LabelMill LM1012TTS. Designed for the modern manufacturer, this semi-automatic tabletop system utilizes unique rail-mounted technology to transition seamlessly between dispensing, tamping, round-product wrapping, and flag applications. Engineered for heavy-duty performance and featuring an integrated "smart" interface, the LM1012TTS ensures your labeling is as flexible as the market demands. Master your workflow with the ultimate all-in-one solution.

System Highlights

- + Heavy Duty Modular Industrial Design
- + 12" Standard Storage Spool
- + Integrated User Interface
- + 10-30 ppm
- + Quick & Easy Changeover
- + Batch Counter & Job Storage
- + System & Printer Status Outputs
- + Loose-Loop Printer Interface

Standard Specifications

Labeling Speed / Throughput Rate

10-30 labels/minute (application method, product size & label size dependent)

Interface Sensors

Photoelectric Label Sensor, Programmable Stop Delay, Product Sensor - Photoeye / PLC Input, Programmable On Delay, Auxiliary Outputs with Connector, Push Button or Foot Switch Activation

Label Placement Tolerance

Up to +/- 1/32" when labels are produced to specifications & product handling is controlled

Electrical Input

100-240VAC / 60hz -- 5 Amps

Label Roll Capacity

12" max outside diameter, wound on a 3" core, die-cut, waste removed with a minimum 1/8" gap separation between labels in running direction

Air Requirements

80 PSI / 3 CFM required

Acceptable Label Sizes

Minimum 0.5" Wide X 0.5" Long
Maximum 6.5" Wide X 20.0" Long
(Module Dependent, Optional Sizes Available)

Environment

Operating 40-140 degrees F (10-35 degrees C),
15-85% relative humidity, non-condensing

General Size

20" wide x 26" deep x 24" high

System Weight

40 lbs + module weight (Approx 5-7 lbs each)

Product Compatibility



Containers



Bags/Pouches



Bottles/Tubes



Cables/Wires



Boxes/Cartons




Shipping


Optional Modules



Tamp Module



Split Tamp



Tamp Blow



Dual Cartridge
Flip Tamp



Round Module



Round Module
Gallon



Flag Module



Clamshell Flag

Optional Features

- + 8.5" & 10.5" System Width Upgrades
- + Print & Apply Loose-Loop
 - o Thermal Transfer or Direct Thermal Print
 - o Full Color Inkjet Label Application
- + Clear (Capacitive) Electronic Label Sensor
- + Mechanical Label Sensors
- + Broken Web Indicator
- + Custom Product Fixtures
- + Precision X-Y Adjustment Table
- + Tapered Rollers (Round Module Carriage)
- + Custom Guarding / System Interlocks
- + Two-Hand Anti Tie-Down Input
- + Custom Application Methods
- + Custom Tamp Stroke Lengths
- + Custom Programming
- + Custom Configurations